



Inclinometers of high measurement accuracy with an integrated 4...20mA signal conditioner for inclination measurement in the ranges of ± 10 , ± 30 and ± 80 degrees

Features

- integrated sensor electronics including signal conditioner
- normalized 4...20mA output signal
- electronic compensation of the temperature drift of the sensitivity
- 2-wire connection - sensor power obtained from current loop
- linear output characteristics
- high measurement accuracy
- minimal linearity deviation
- high long-term stability
- hysteresis free output signal
- no interference by ambient electromagnetic fields
- shock proof as without moving mechanical parts
- hermetically sealed
- sensor electrically isolated from point of measurement - no ground connection
- zero point adjustable through 360° using clamping ring
- loop current limitation
- EMC certified

Description

The NG2I, NG3I and NG4I are capacitive and liquid based inclinometers with integrated sensor electronics and current amplifier. Electronic temperature compensation makes up for the temperature drift of the sensitivity of the primary transformer. An integrated, highly stable voltage regulator ensures stable operation for a range of supply voltages. The measurement technique provides a linear relationship between the angle to be measured (up to 80 degrees for the NG4I) and the output signal that is calibrated during manufacture. The measuring time constant can be matched to the requirements of the measurement task by appropriate hardware programming. The power is obtained from the measurement current loop, thereby eliminating the need for a separate power supply and enabling operation with two wire connection.

Application

The NG2I, NG3I and NG4I are suitable for applications requiring high measurement accuracy with high linearity and temperature stability as well as high long-term stability for measurement of large inclination angles and for which the power is to be supplied via a 4...20mA current loop without the need for a separate supply voltage. We recommend the sensorbox SB1I with an integrated NG - inclinometer and a 4...20mA output signal for operation in especially harsh operating conditions. These inclinometers are typically used in construction, mining, vehicles, aircraft, ships, transportation and conveyor systems and process control as well as for safety engineering.

Specifications

Type	NG2I	NG3I	NG4I
Measuring range	±10 degrees	±30 degrees	±80 degrees
Resolution	<0.001 degrees	<0.003 degrees	<0.01 degrees
Standardized sensitivity (other normalization on request)	0.8mA/degree	0.266mA/degree	0.1mA/degree

Shared specifications	
Dimensions	see dimension drawing
Linearity deviation	<0.1% of measuring range
Transverse sensitivity	<0.5% at 45° tilt [TBD]
Settling time	approx. 0.3 seconds (1s, 2s or 3s optional)
Temperature drift of sensitivity	approx. -0.005(8)%/K
Temperature drift of zero point	approx. 0.001(5)°/K
Terminal voltage	10V ... 30V either polarity
Output current offset for sensor zero position	12mA
Degree of protection	IP65
Operating temperature	-40°C ... +85°C
Storage temperature	-45°C ... +90°C
Weight (without clamping ring or cable)	approx. 118g
Electrical connection	<ul style="list-style-type: none"> • 0.5m cable Ø4.6 mm, 2-wires • special lengths on request



• Each sensor is calibrated after production. It is delivered with an individual calibration record that includes the precise offset and sensitivity values, the static characteristic curve and the linearity deviation curve.

Options:


- special measuring range
- enhanced EMC requirements

Dimensions (in mm)


Reinforced glassfiber isolated housing (adjust zero offset by turning housing and fixing with the aluminium ring)

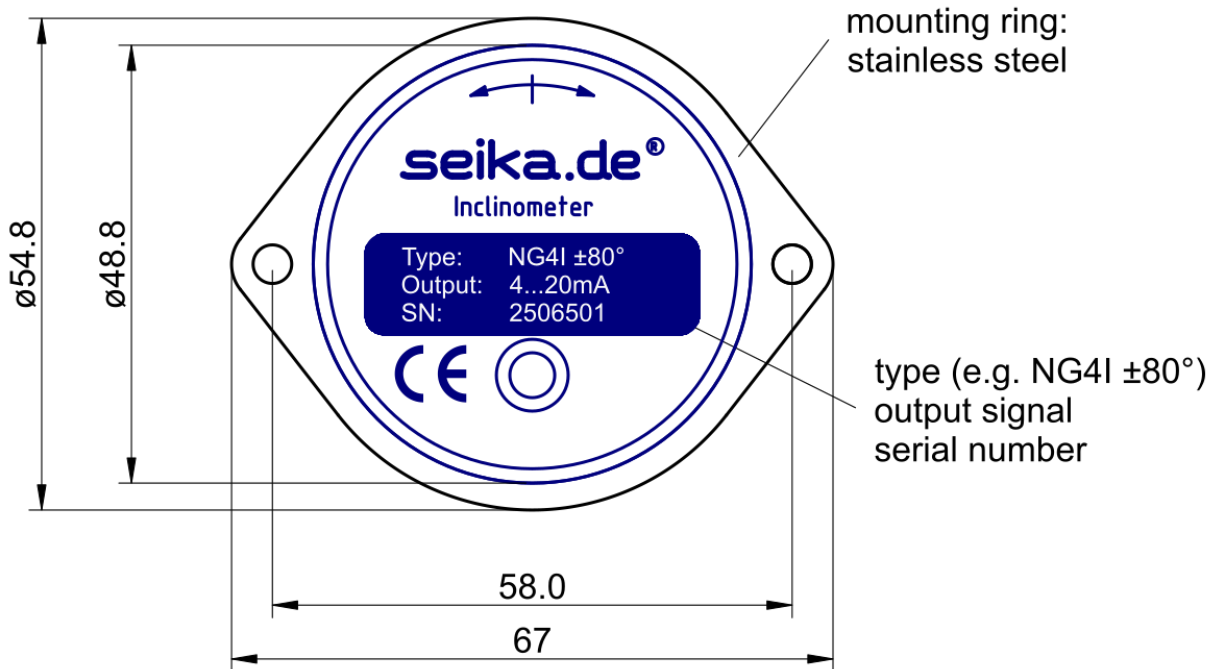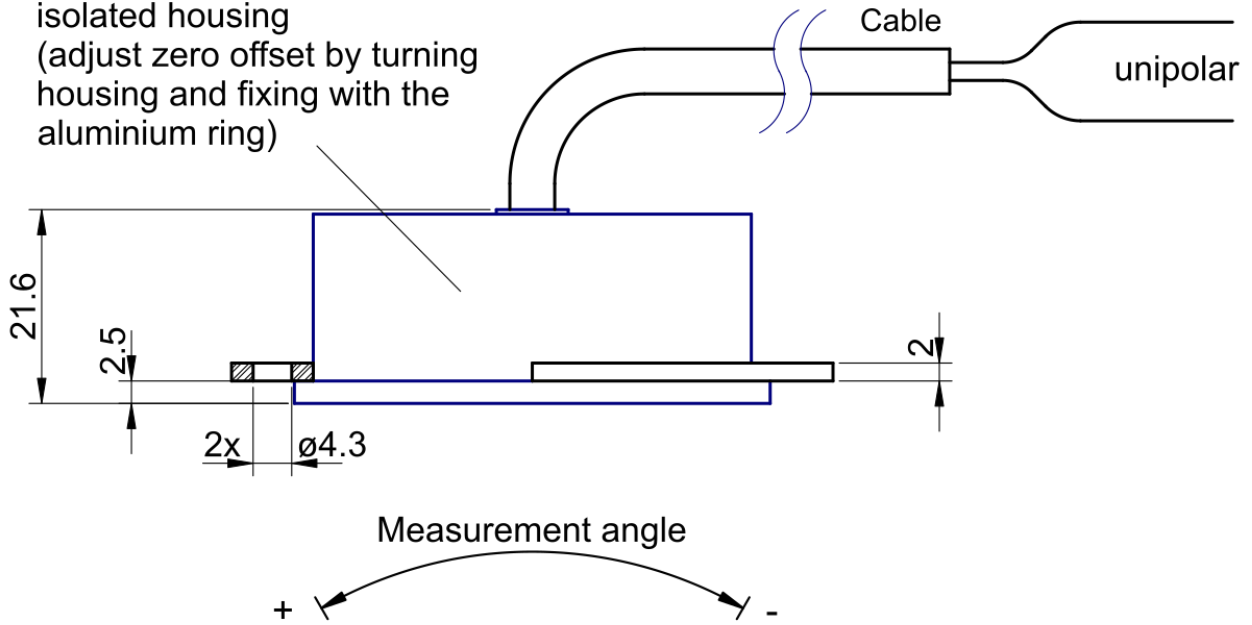

Block diagram

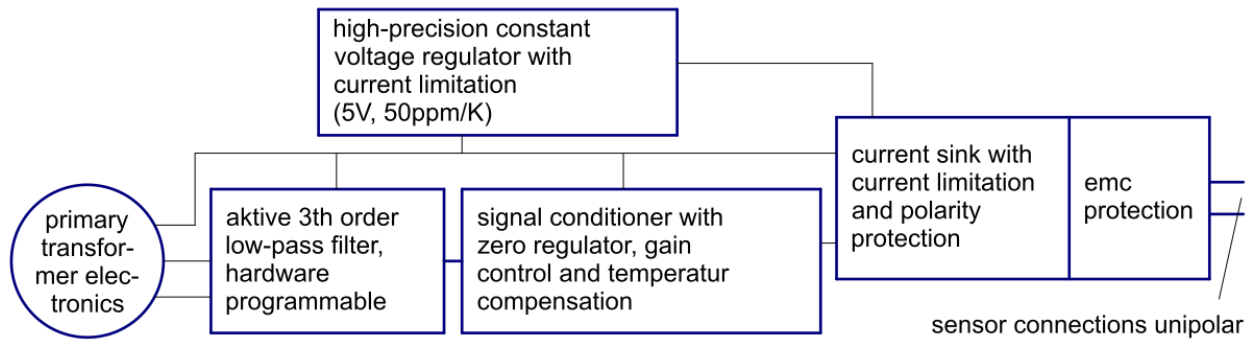

Connections

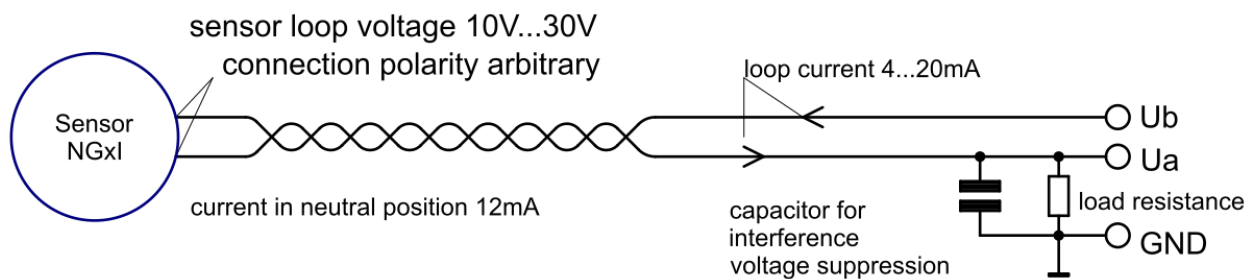

Minimal loop current: 2.5mA ... 3.5mA. Loop current limitation: 22mA ... 26mA.

Computing the minimal operating voltage $U_{b,min}$

$$U_{b,min} = 10V + \text{voltage drop at cabel} + \text{load resistor voltage drop at 20mA}$$

$$= 10V + 20mA \cdot R_{cabel} + 20mA \cdot R_{load}$$

Example computations:

$$U_{b,min} = 10V + (100m \text{ wire } 2 \times 0.14mm^2) 0.6V + (100 \text{ Ohm load}) 2V = 12.6V$$

$$U_{b,min} = 10V + (2km \text{ cabel } 2 \times 0.5mm^2) 3.2V + (500 \text{ Ohm load}) 10V = 23.2V$$